

Quartzite Look

GLAZED PORCELAIN



BEST  **TILE**® / BESTTILE.COM
Riva Stone


GRAY



OFF WHITE



DECORS




2x2 Mosaic
on 12x12 Sheet
Matte

VARIATION




DECORS




2x2 Mosaic
on 12x12 Sheet
Matte

VARIATION

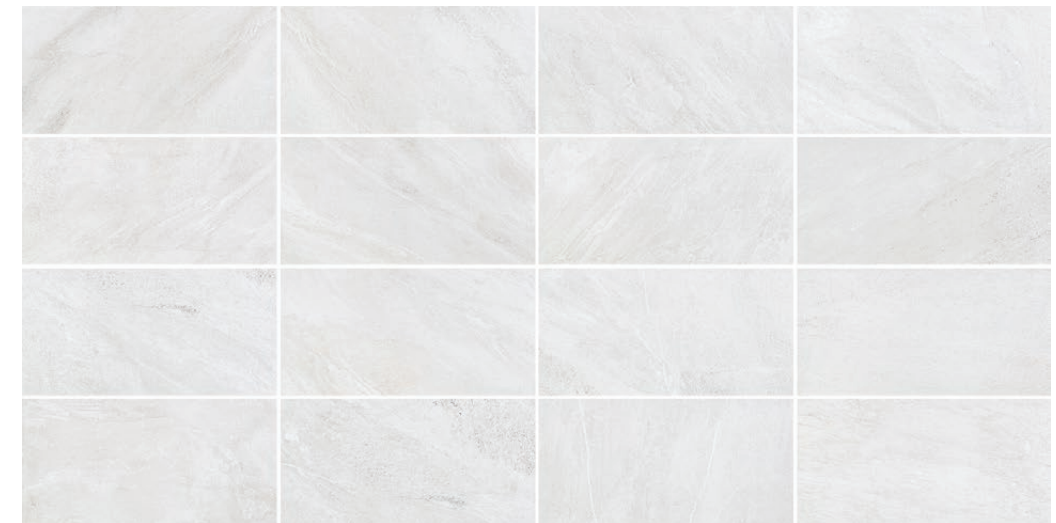

SAND

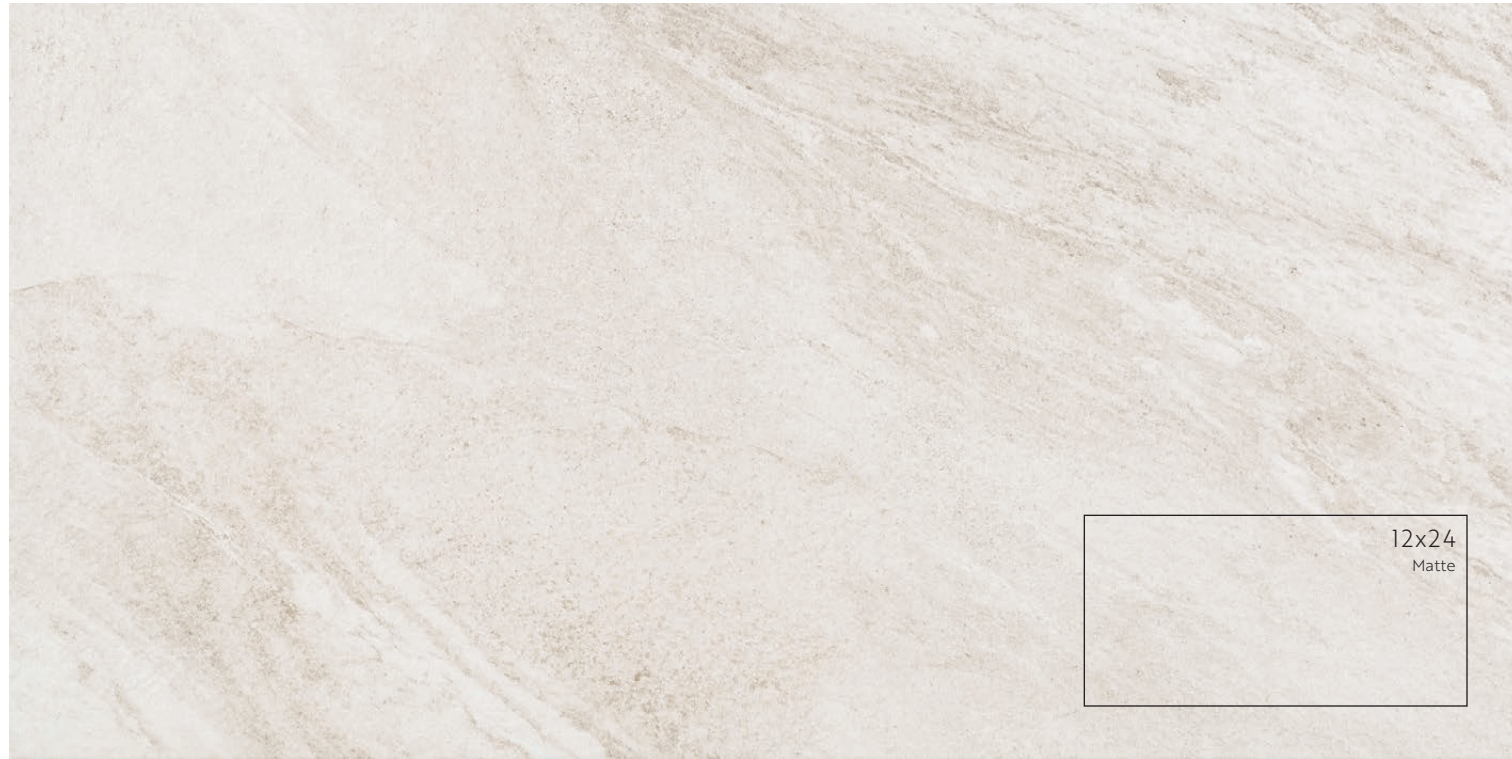


DECORS



2x2 Mosaic
on 12x12 Sheet
Matte

VARIATION

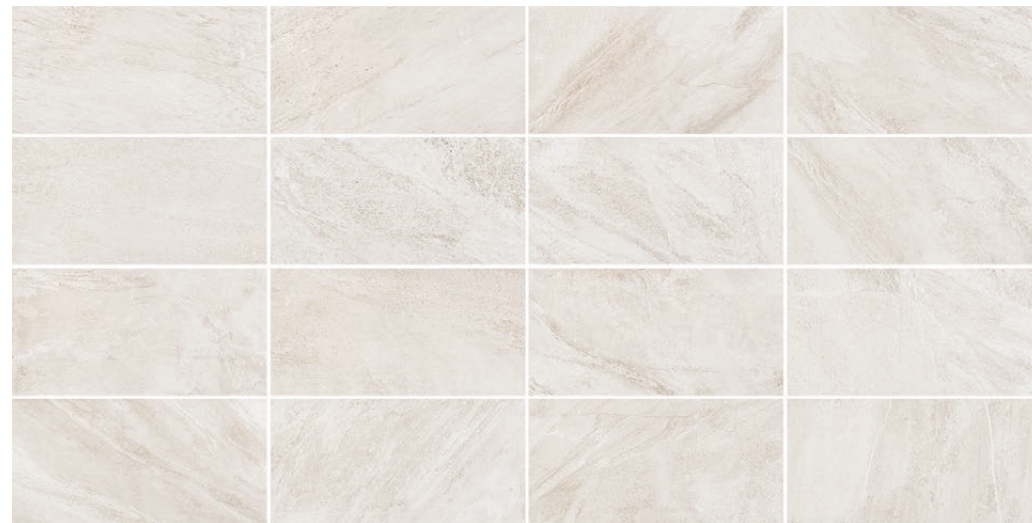

Quartzite Look

GLAZED PORCELAIN

BEST TILE® / BESTTILE.COM

Riva Stone

COLORS, SIZES & AVAILABILITY

NOMINAL SIZE	FINISH	THICKNESS	GROUT JOINT	GRAY	OFF WHITE	SAND
12 x 24	Matte	9.5 mm	3/16"	✓	✓	✓
2 x 2 Mosaic	Matte	9.5 mm	3/16"	✓	✓	✓

✓ Stock Item. ⌚ Non-Stock Item. Requires Extra Lead Time.

TECH INFO

R = Residential, LC = Light Commercial, C = Commercial

ORIGIN: Brazil SHADE VARIATION: V2 - Slight Variation WEAR RATING: Class 4 - Rated for residential and light commercial applications It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.	RECOMMENDED APPLICATIONS	R	LC	C
	FLOORS	●	●	
	WALLS / BACKSPLASH	●	●	●
	POOL DECKING	*	*	
	EXTERNAL USE - FROST PROOF	*	*	

● Approved for this application. * Discuss proper installation method with your Sales Representative.

TILE PERFORMANCE DATA

TECHNICAL FEATURE	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5 %
Abrasion Resistance (Glazed)	ISO 10545-7	4
Breaking Strength	ISO 10545-4	≥ 250 lbf
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.45
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Class B
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Class B
Resistance to Stains	ISO 10545-14	Class A



VIEW WEBPAGE

ONE SAND 2X2 MOSAIC

RIVA STONE SAND 12X24

BEST TILE[®]

BESTTILE.COM

MARYLAND | MASSACHUSETTS | NEW JERSEY | NEW YORK | NORTH CAROLINA | PENNSYLVANIA | RHODE ISLAND | VERMONT | VIRGINIA