


Beyond Terrazzo

COLOR BODY • GLAZED PORCELAIN

BEST  TILE® / [BESTTILE.COM](https://besttile.com)

Create

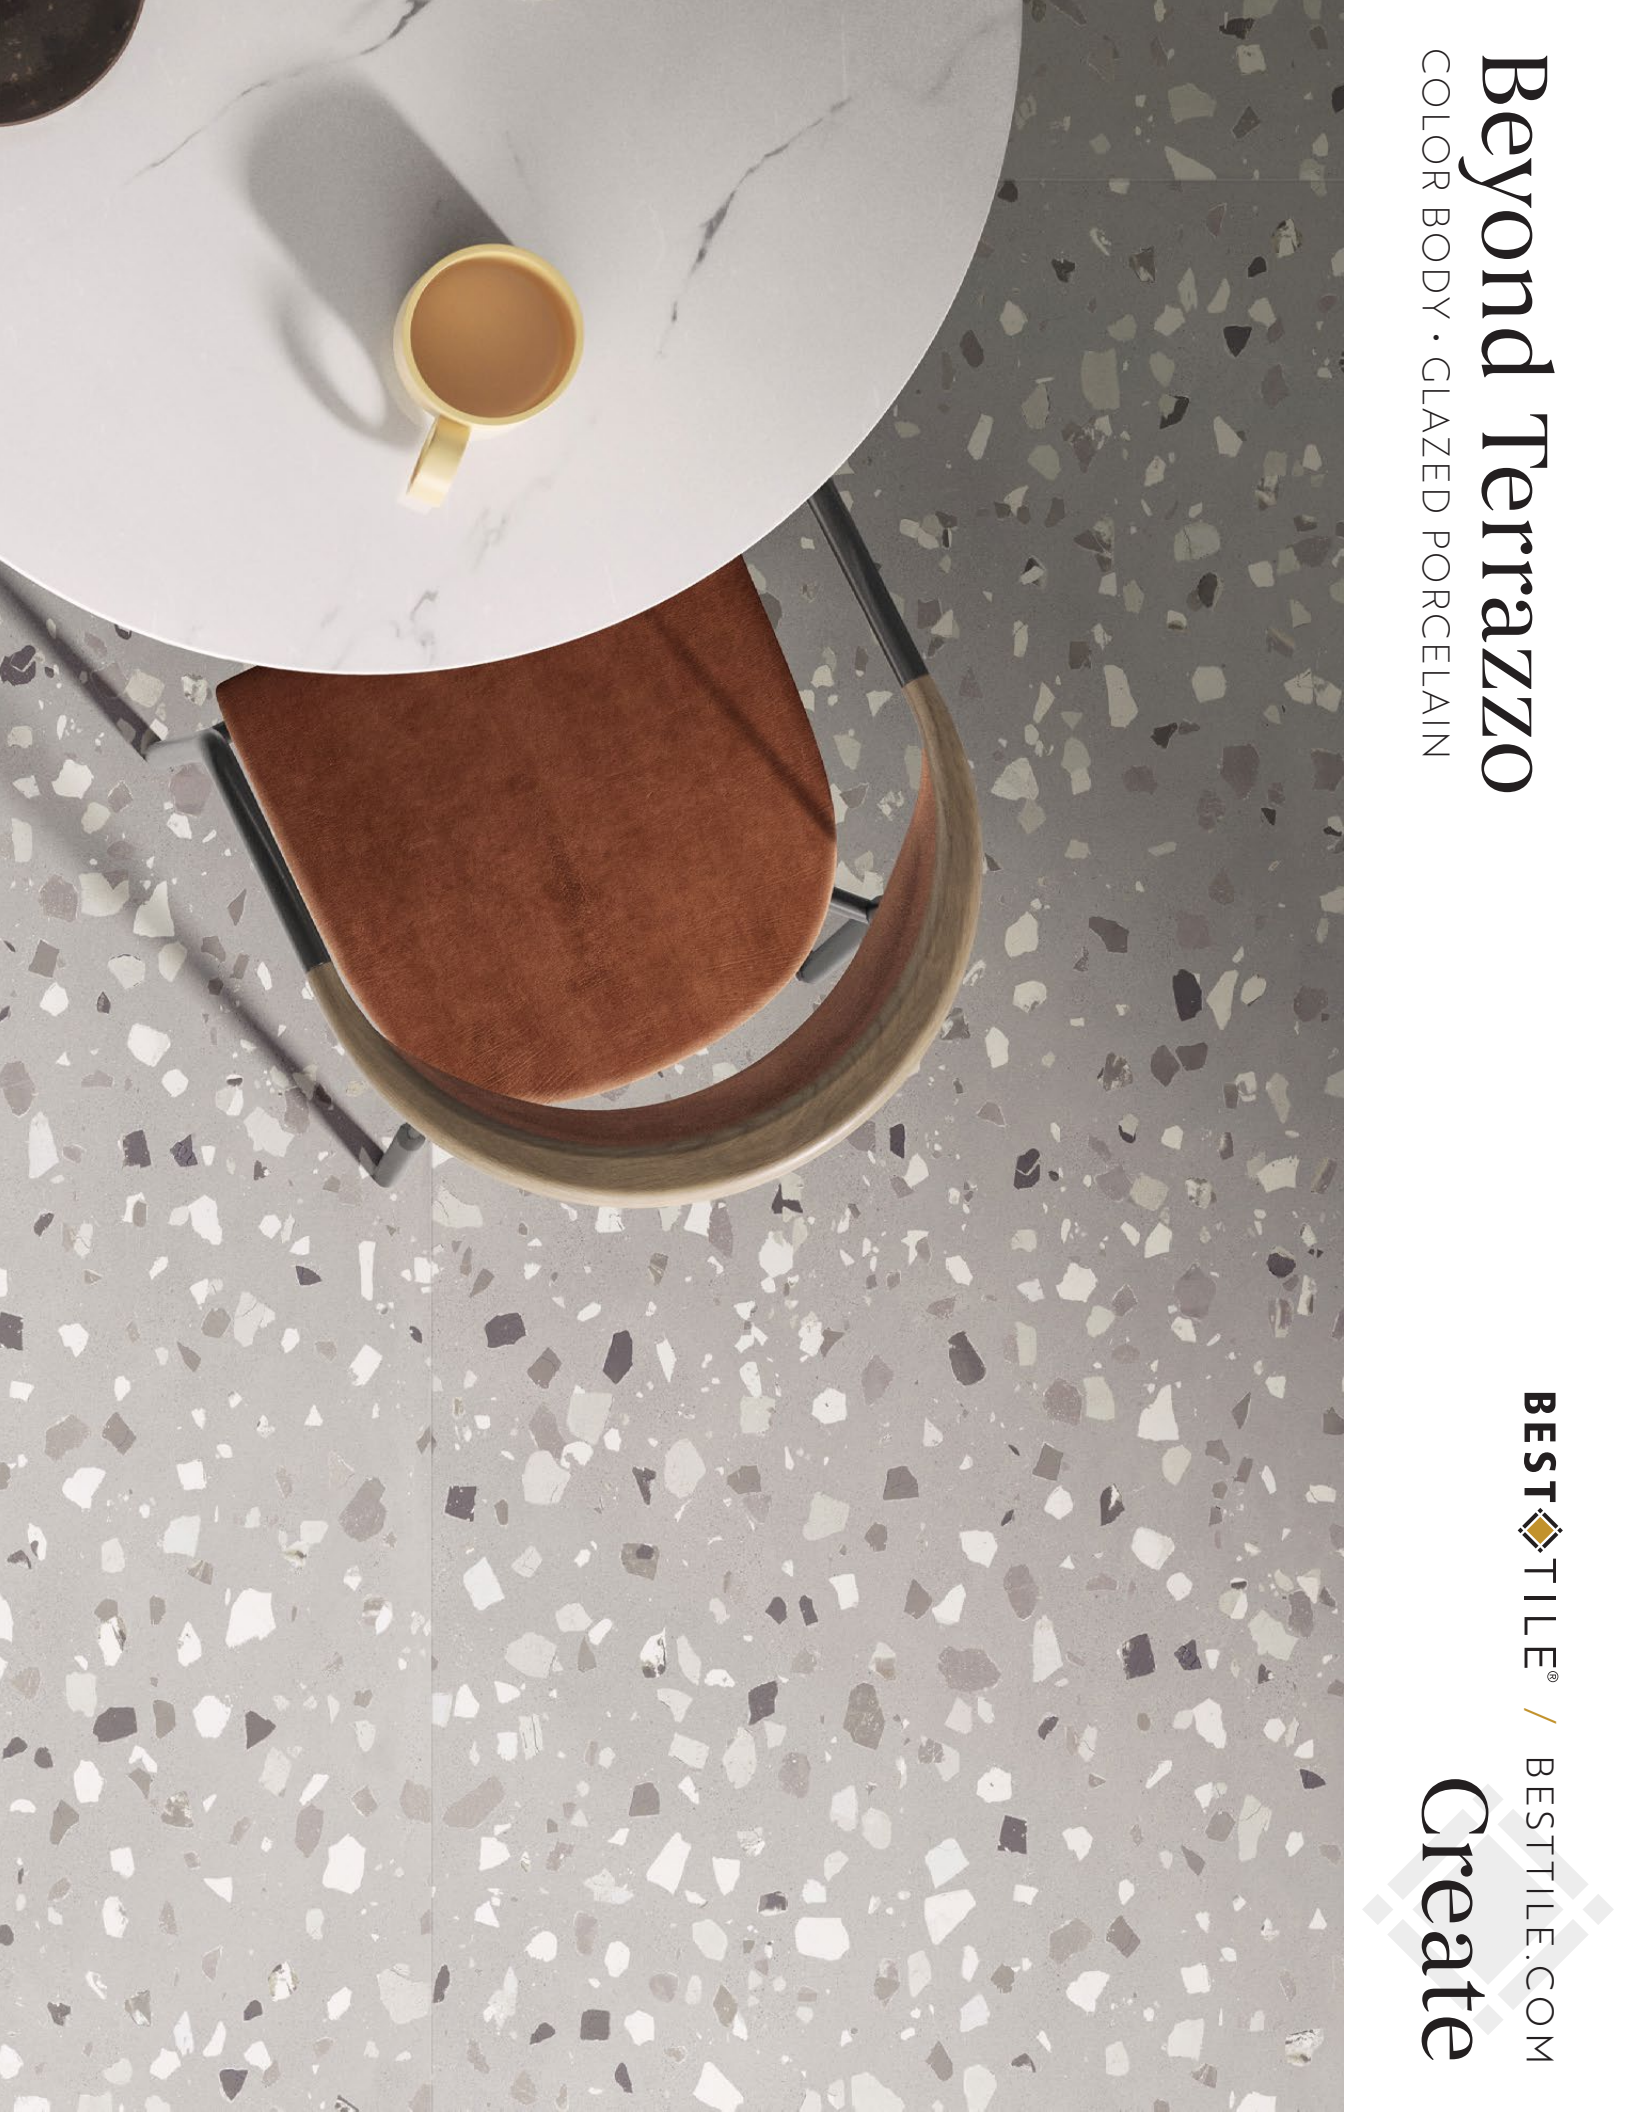



Floor // CREATE WHITE 24X24 MEDIUM
Backsplash // CREATE WHITE 24X24 MICRO



GREY




48x48 Micro




36x36 Micro




24x24 Micro

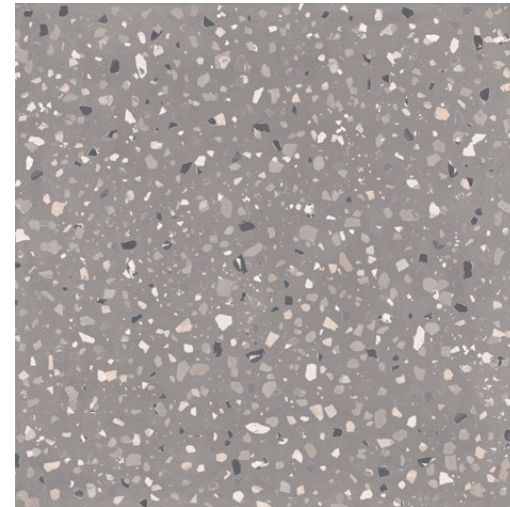


48x48 Medium

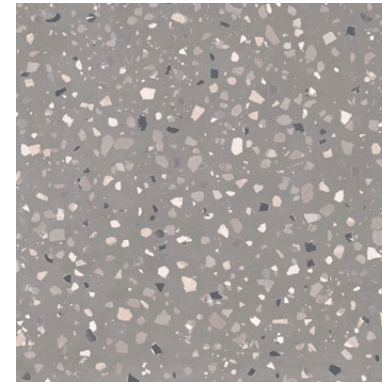


36x36 Medium



24x24 Medium

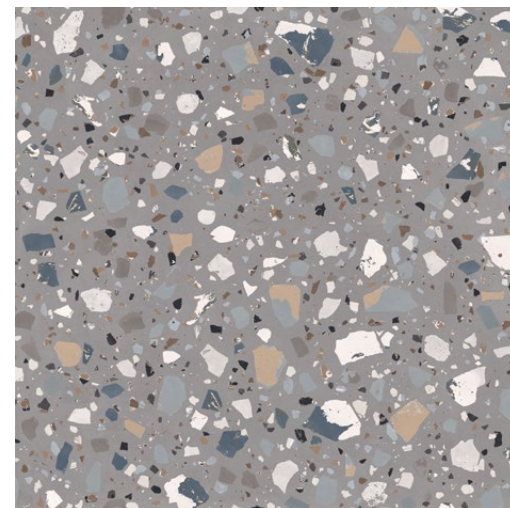


48x48 Maxi Deco

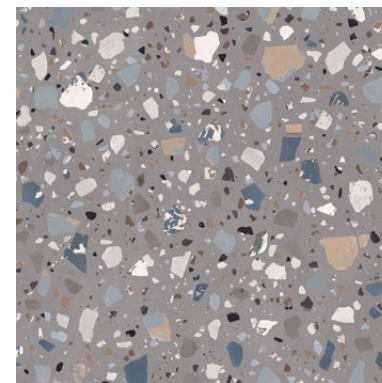

36x36 Maxi Deco

PEARL

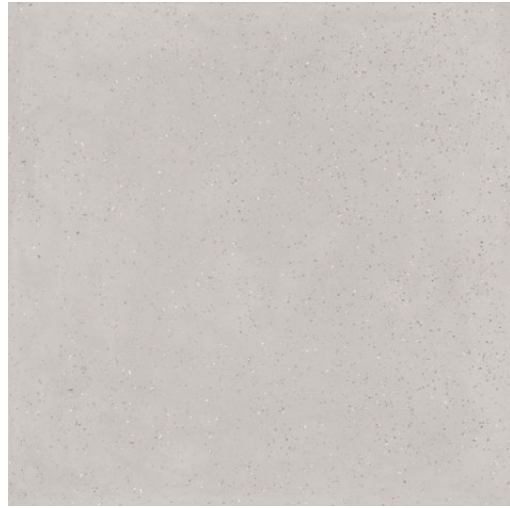


48x48 Micro




36x36 Micro




24x24 Micro

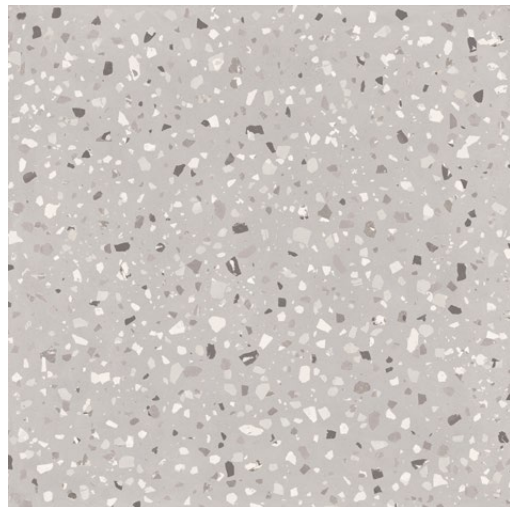

48x48 Medium

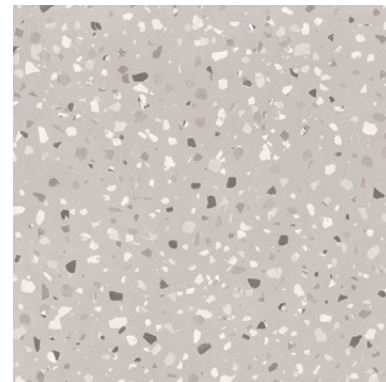

36x36 Medium



24x24 Medium





SAND




48x48 Micro




36x36 Micro




24x24 Micro

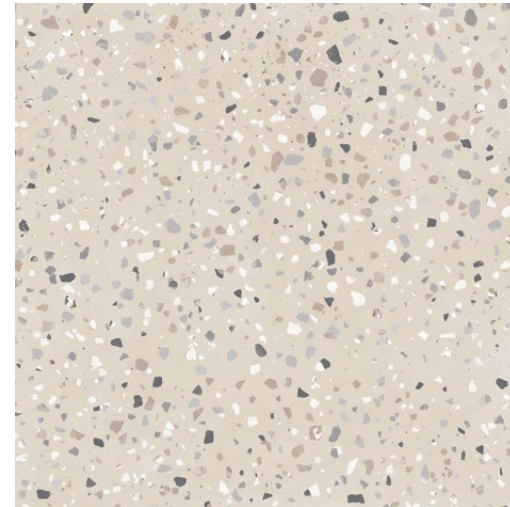

48x48 Medium

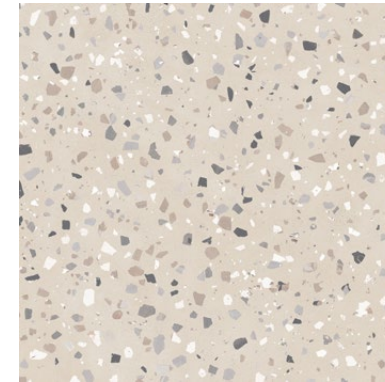


36x36 Medium



24x24 Medium


WHITE

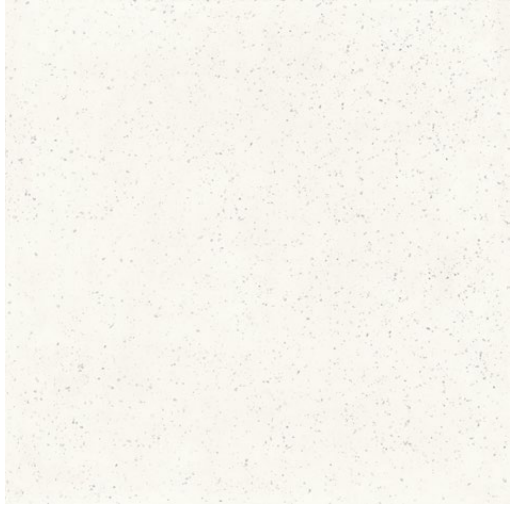


48x48 Micro




36x36 Micro




24x24 Micro

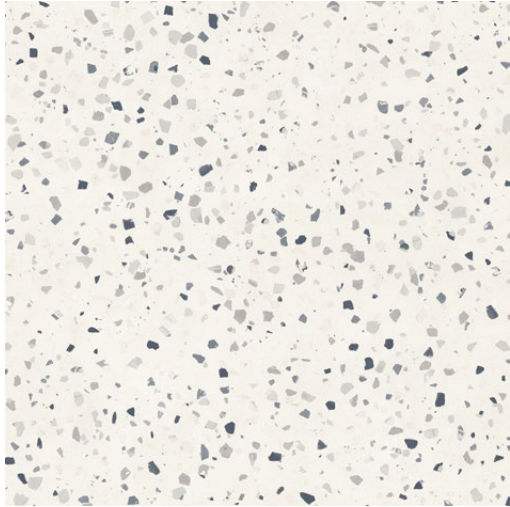


48x48 Medium

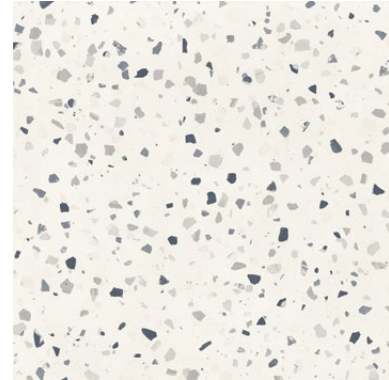


36x36 Medium



24x24 Medium

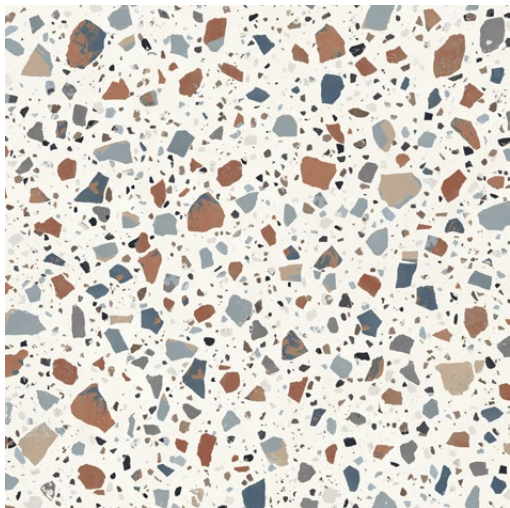

48x48 Maxi Deco

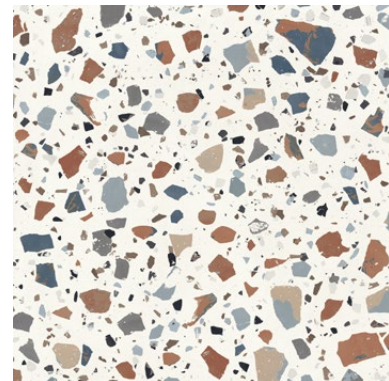

36x36 Maxi Deco

Floor // CREATE WHITE 36X36 MAXI DECO; Wall // CREATE WHITE 36X36 MICRO





Beyond Terrazzo

COLOR BODY • GLAZED PORCELAIN

Create



COLORS, SIZES & AVAILABILITY

NOMINAL SIZE	FINISH	THICKNESS	GROUT JOINT	GREY	PEARL	SAND	WHITE
24 x 24 Micro	Matte	10 mm	1/8"	✓	✓	✓	✓
24 x 24 Medium	Matte	10 mm	1/8"	✓	✓	✓	✓
36 x 36 Micro	Matte	10 mm	1/8"	⊘	⊘	⊘	⊘
36 x 36 Medium	Matte	10 mm	1/8"	⊘	⊘	⊘	⊘
36 x 36 Maxi Deco	Matte	10 mm	1/8"	⊘			⊘
48 x 48 Micro	Matte	10 mm	1/8"	⊘	⊘	⊘	⊘
48 x 48 Medium	Matte	10 mm	1/8"	⊘	⊘	⊘	⊘
48 x 48 Maxi Deco	Matte	10 mm	1/8"	⊘			⊘

✓ Stock Item. ⊘ Non-Stock Item. Requires Extra Lead Time.

TECH INFO

ORIGIN: Italy
SHADE VARIATION: V2 - Slight Variation
WEAR RATING: Class 5 - Rated for all residential and commercial applications
 It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.
 Contains 25% Pre-Consumer Recycled Content.

RECOMMENDED APPLICATIONS	R = Residential, LC = Light Commercial, C = Commercial		
	R	LC	C
FLOORS	●	●	●
WALLS / BACKSPASH	●	●	●
POOL DECKING	*	*	*
EXTERNAL USE - FROST PROOF	*	*	*

● Approved for this application. * Discuss proper installation method with your Sales Representative.

TILE PERFORMANCE DATA

TECHNICAL FEATURE	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5 %
Abrasion Resistance (Glazed)	ISO 10545-7	5
Breaking Strength	ISO 10545-4	≥ 45 N/mm ²
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.42
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Min. Class GB
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Min. Class GB
Resistance to Stains	ISO 10545-14	Min. Class 3
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant



[VIEW WEBSITE](#)

Floor // CREATE PEARL 48X48 MEDIUM

BEST  **TILE**®

BESTTILE.COM

MARYLAND | MASSACHUSETTS | NEW JERSEY | NEW YORK | NORTH CAROLINA | PENNSYLVANIA | RHODE ISLAND | VERMONT | VIRGINIA