




Deparisa | Porcelain




AVAILABLE SIZES



DESCRIPTION





Deparisa brings an exciting, modern look to traditional floor tile and wall tile combinations. Its industrial floor look inspiration is just the start: Hints of oxidation and subtle cement tile movement elevate this contemporary look to a new standard. Five beautifully muted colorways are offered in a 12" x 24" rectified porcelain floor tile in natural (matte) and lappato (semi-polished) finishes, complemented by a 10" x 20" ceramic wall tile in either a plain flat or embossed linear decorative tile 'Concept'. A 2" x 2" porcelain mesh-mounted mosaic adds dimension to your design. Deparisa porcelain is rated PEI 5 for all Residential and Commercial applications.

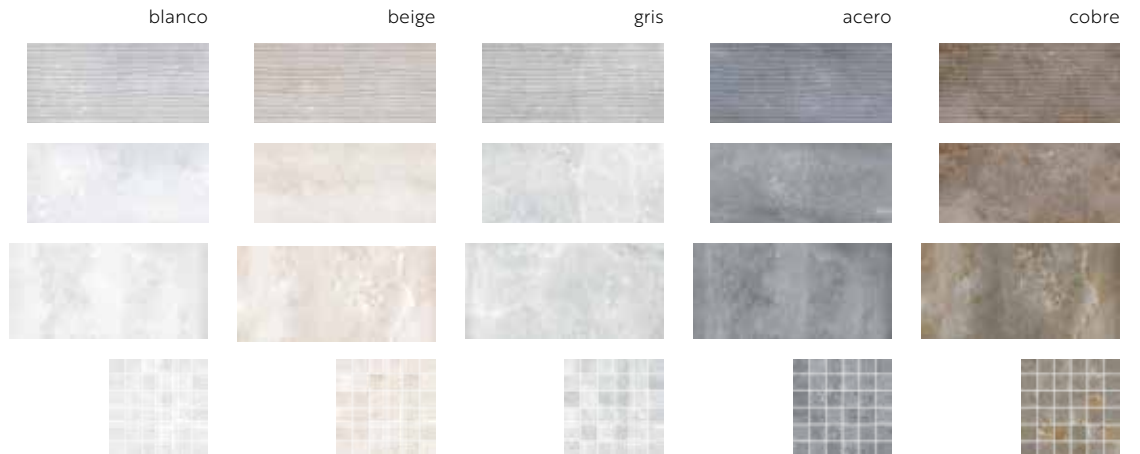COLORS





TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness	Availability
10 x 20 Wall		Matte	9.2 mm	✓
10 x 20 Wall Concept		Matte	9.2 mm	✓
12 x 24 Rectified		Matte/ Lappato	9.4 mm	✓
2 x 2 Mosaic		Matte	9.4 mm	✓

COORDINATING TRIM

Nominal	Shape	Finish	Thickness	Availability
2 x 10 wall bullnose		Matte	9.2 mm	✓
3 x 24 Bullnose		Matte/ Lappato	9.4 mm	✓

✓ Stock Item. ⓪ Non-Stock Item. Requires Extra Lead Time.

PERFORMANCE DATA

Characteristic	Norms	Results
Water Absorption	ISO 10545-3	< 0.15 %
Deep Abrasion	ISO 10545-6	< 130 mm ³
Abrasion Resistance	ISO 10545-7	5
Breaking Strength	ISO 10545-4	50 N/mm ²
Dynamic Coefficient of Friction Wet	AcuTest	Natural: 0.48 Lappato: 0.44
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	UA
Chemical Resistance -Low Concentration of Acids and Bases	ISO 10545-13	ULA
Thermal Shock	ISO 10545-9	Resists
Resistance to Stains	ISO 10545-14	Class 5
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resists

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

10x20 / 2x10 bullnose: 1 - Rated for wall applications only

All other sizes: 5 - Rated for all residential and commercial applications

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗	✗
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING	* (Natural)	* (Natural)	
EXTERNAL USE - FROST PROOF	* (Natural)	* (Natural)	

✗ - Has been approved for this application.

* - Discuss proper installation method with your Sales Representative.

NOTES

It is not recommended to stagger any tile longer than 20% more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 3/16" for 10x20; 1/8" for 12x24

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.