





AVAILABLE SIZES



DESCRIPTION





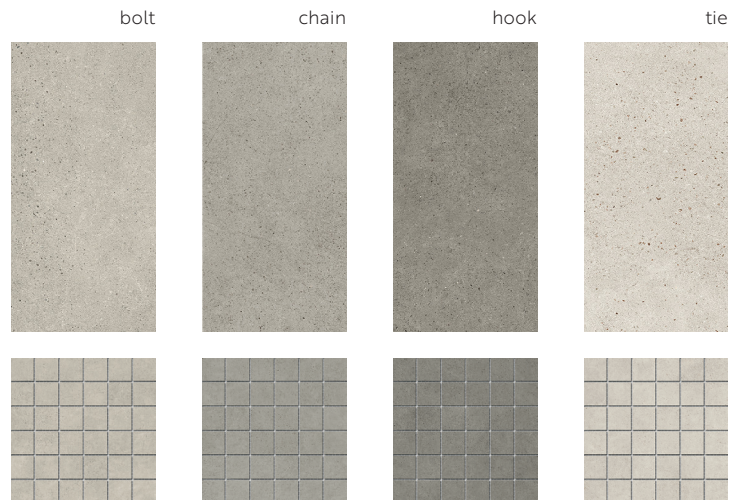

Link is an American-made color body porcelain tile that merges a natural stone tile look with a refined interpretation of a concrete surface. It's gentle movement is beautifully shown across uniform color tones of Ivory, Taupe, Grey and Dark Grey. A contemporary tile series, Link comes in multiple field tile and mosaic tile formats, perfect for a modern, subtle living space design. This porcelain tile series is rated PEI 5 for all commercial and residential settings.

COLORS





TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness	Availability
6 x 24 Rectified		Matte	9 mm	☺
12 x 24 Rectified		Matte	9 mm	✓
24 x 24 Rectified		Matte	9 mm	☺
24 x 48 Rectified		Matte	9 mm	☺
12 x 12 Fuse Deco		Matte	9 mm	☺
2 x 2 Mosaic		Matte	9 mm	✓

COORDINATING TRIM

Nominal	Shape	Finish	Thickness	Availability
3 x 24 Bullnose		Matte	9 mm	✓
6 x 12 Cove Base		Matte	9 mm	☺

✓ Stock Item. ☺ Non-Stock Item. Requires Extra Lead Time.

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ASTM C373	≤ 0.50 %
Breaking Strength	ASTM C648	≥400 lbs
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.42
Thickness Dimension	ASTM C499	In Accordance
Facial Dimension	ASTM C499	In Accordance
Warpage Diagonal	ASTM C485	In Accordance
Wedging Average	ASTM C502	In Accordance
Frost Resistance	ASTM C1026	Frost Proof
Chemical Resistance	ASTM C650	Unaffected
Scratch Hardness	MOHS	6

SHADE VARIATION



V2 - SLIGHT VARIATION
Clearly distinguishable differences in texture and/or pattern within similar colors.

WEAR CODE

5 - Rated for all residential and commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗	✗
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING	*	*	
EXTERNAL USE - FROST PROOF	*	*	

✗ - Has been approved for this application.
* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 1/8"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.

