






Provence | Porcelain


AVAILABLE SIZES



DESCRIPTION





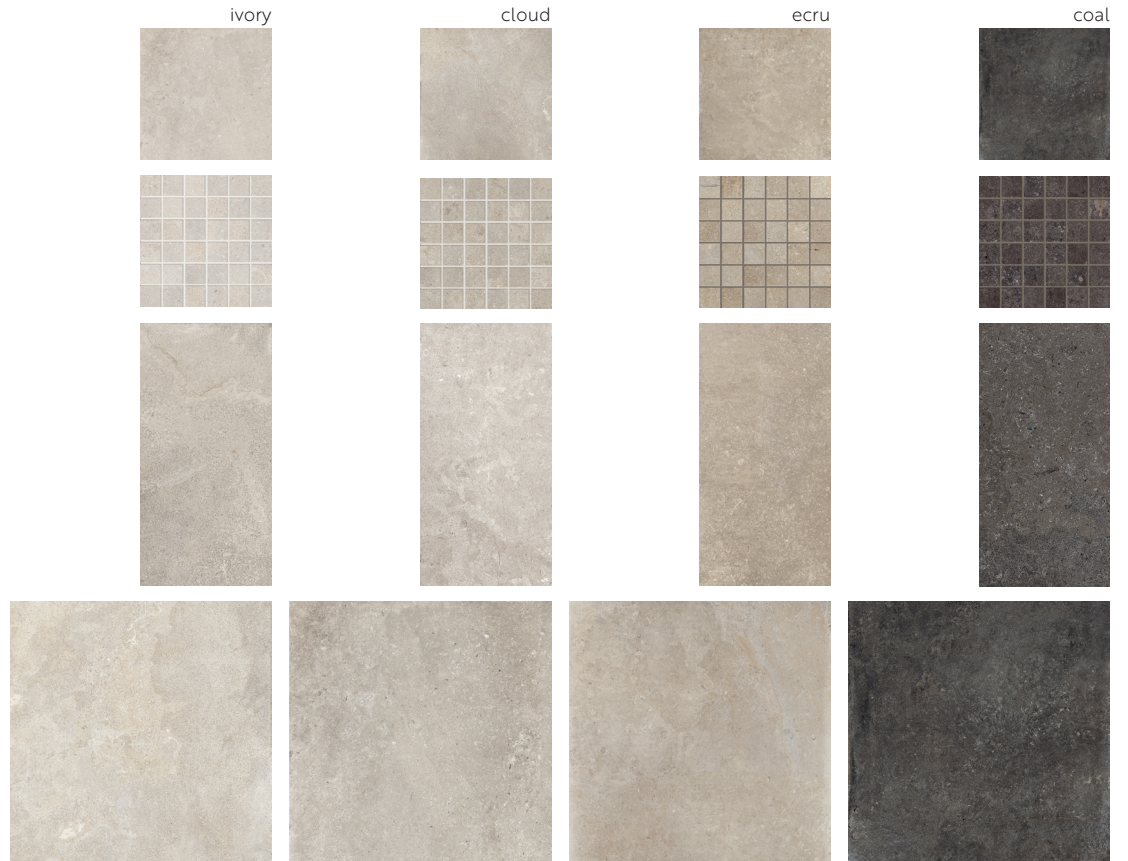

Provence is a rectified Italian glazed porcelain tile that updates French Limestone tile and Belgian Bluestone tile looks. Modern modular tile pattern sizes include 12" x 12", 12" x 24" and 24" x 24" formats. The Provence tile series is available in four contemporary field tile colors: Ivory, Grey ('Cloud'), Black ('Coal') and Taupe ('Ecrú'). Best Tile has successfully updated a traditional look by crafting a modern interpretation of French Limestone tiles on a screen and color palette that is muted, elegant and consistent. This series can be designed with individual porcelain field tile formats or with a modular tile pattern approach. Provence is rated PEI 4 for all light commercial and residential settings.

COLORS




TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness	Availability
12 x 12 Rectified		Matte	10 mm	✓
12 x 24 Rectified		Matte	10 mm	✓
24 x 24 Rectified		Matte	10 mm	✓
18 x 36 Rectified		Matte	10 mm	⊖
36 x 36 Rectified		Matte	10 mm	⊖
2 x 2 Mosaic		Matte	10 mm	✓

COORDINATING TRIM

Nominal	Shape	Finish	Thickness	Availability
3.5x24 Bullnose		Matte	10 mm	✓

✓ Stock Item. ⊖ Non-Stock Item. Requires Extra Lead Time.

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.05 %
Abrasion Resistance	ISO 10545-7	4
Breaking Strength	ISO 10545-4	≥ 45 N/mm ²
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.42
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Resists
Chemical Resistance - Low Concentration of Acids	ISO 10545-13	Resists
Scratch Hardness	MOHS	9
Resistance to Stains	ISO 10545-14	Class 5

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

4 - Rated for all residential and light commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗	
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING	*	*	
EXTERNAL USE - FROST PROOF	*	*	

✗ - Has been approved for this application.

* - Discuss proper installation method with your Sales Representative.

NOTES

It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 1/8"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.