








# Georgetown | Glazed Porcelain



## AVAILABLE SIZES



## DESCRIPTION


Georgetown is our newest Spanish porcelain collection featuring a slightly chiseled edge while imitating the look of soft breccia marble. Select from several formats including a traditional 13x13 tile or a pattern option perfect for floors. Complement walls with a 10x20 format and coordinating decoratives. Georgetown is available in three subtle yet appealing shades of beige and grey and is suitable in residential and light commercial spaces.

## COLORS

beige







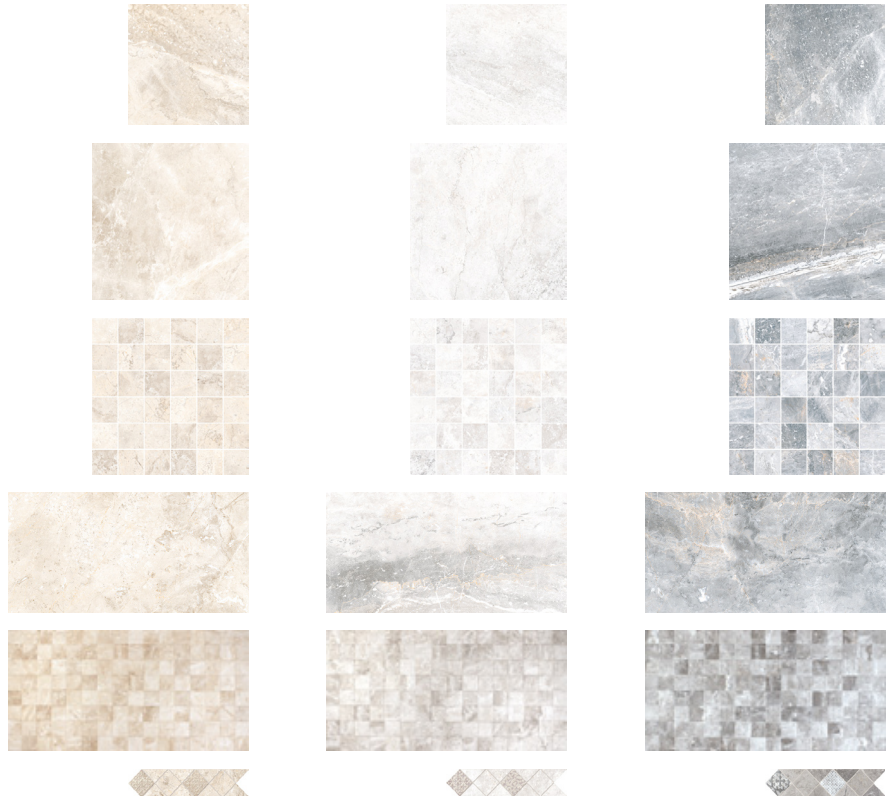
bone

grey





# TECHNICAL INFORMATION

## TILE SIZES

Nominal	Shape	Finish	Thickness
10 x 10		Matte	9 mm
13 x 13		Matte	9 mm
2 x 2 Mosaic		Matte	9 mm
10 x 20		Matte	9 mm
10 x 20 Concept		Matte	9 mm
20 x 20		Matte	9 mm
2 x 11 Listel		Matte	9 mm

## COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3 x 10 Bullnose		Matte	9 mm
3 x 20 Bullnose		Matte	9 mm

## PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5 %
PEI Abrasion Resistance (Glazed)	ISO 10545-7	4
Breaking Strength	ISO 10545-4	43 N/mm <sup>2</sup>
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	UHA
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	ULA
Scratch Hardness	MOHS	5
Linear Thermal Expansion	ISO 10545-8	Conforms
Thermal Shock Resistance	ISO 10545-9	Resists
Resistance to Stains	ISO 10545-14	Class 5
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resists

## RECYCLED CONTENT



Contains 35% Recycled Content.

## SHADE VARIATION



### V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

## WEAR CODE

4 - Rated for all residential and light commercial applications.

2x11 Listels: 1 - Rated for wall applications only.

## APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✘	✘	
WALLS / BACKSPLASH	✘	✘	✘
POOL DECKING			
EXTERNAL USE - FROST PROOF			

✘ - Has been approved for this application.  
\* - Information is available upon request.

## NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.