




# Broadview | Glazed Porcelain




## AVAILABLE SIZES



## DESCRIPTION




Best Tile's newest Italian glazed porcelain series, Broadview, combines the look of colorful ceramic cotto with a subtle cement screen to create a new modern aesthetic. Broadview's innovative interpretation of this blended design performs exceptionally well on high traffic floors in both commercial and residential spaces. Broadview is available in two large tile formats with mosaic and trim pieces to accentuate your project.
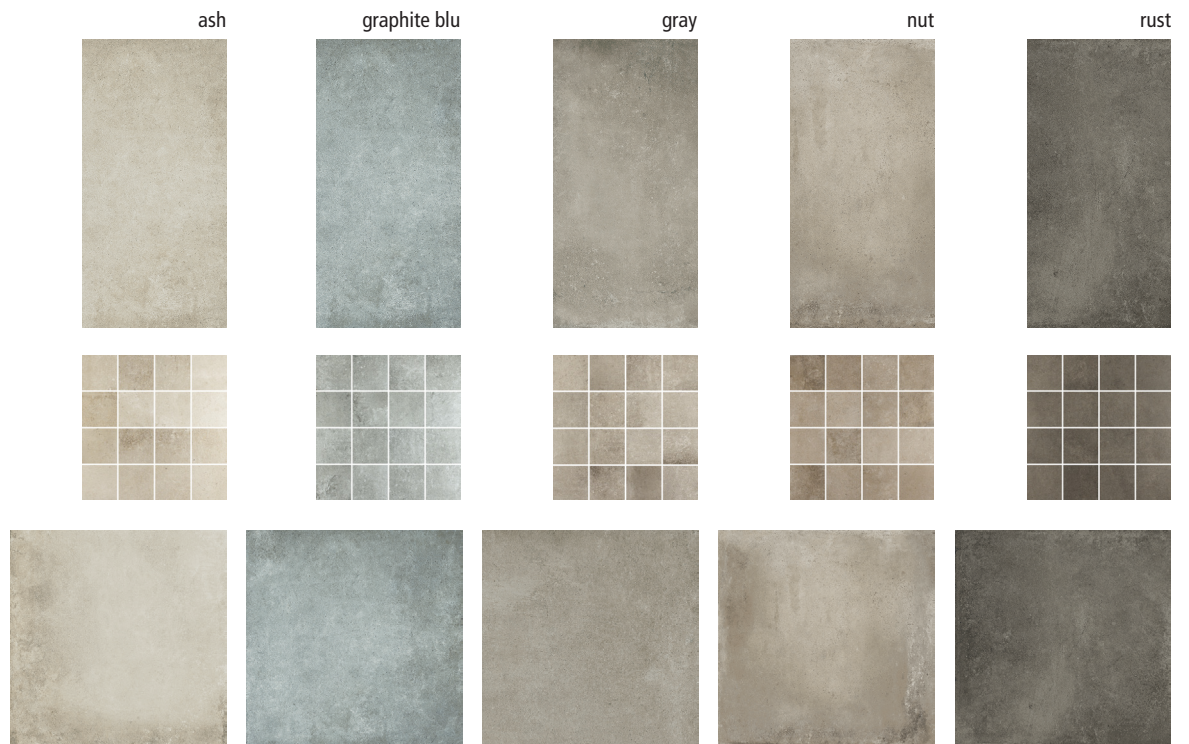
## COLORS




# TECHNICAL INFORMATION

## TILE SIZES

Nominal	Shape	Finish	Thickness
12 x 24		Matte	9.5 mm
3 x 3 Mosaic		Matte	9.5 mm
18 x 18		Matte	9.5 mm

## COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3.125 x 24 Bullnose		Matte	9.5 mm

## PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.3 %
PEI Abrasion Resistance (Glazed)	ISO 10545-7	4 / 5
Breaking Strength	ISO 10545-4	≥ 35 N/mm <sup>2</sup>
Static Coefficient of Friction Wet	C1028	0.62
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Conforms
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Conforms
Scratch Hardness	MOHS	7
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Class 5

## SHADE VARIATION



### V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

## WEAR CODE

Rust: 4 - Rated for all residential and light commercial applications.

All other colors: 5 - Rated for all residential and commercial applications.

## APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗	All except Rust
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING			
EXTERNAL USE - FROST PROOF	✗	*	

✗ - Has been approved for this application.

\* - Information is available upon request.

## NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.