

## Seta | Glazed Porcelain



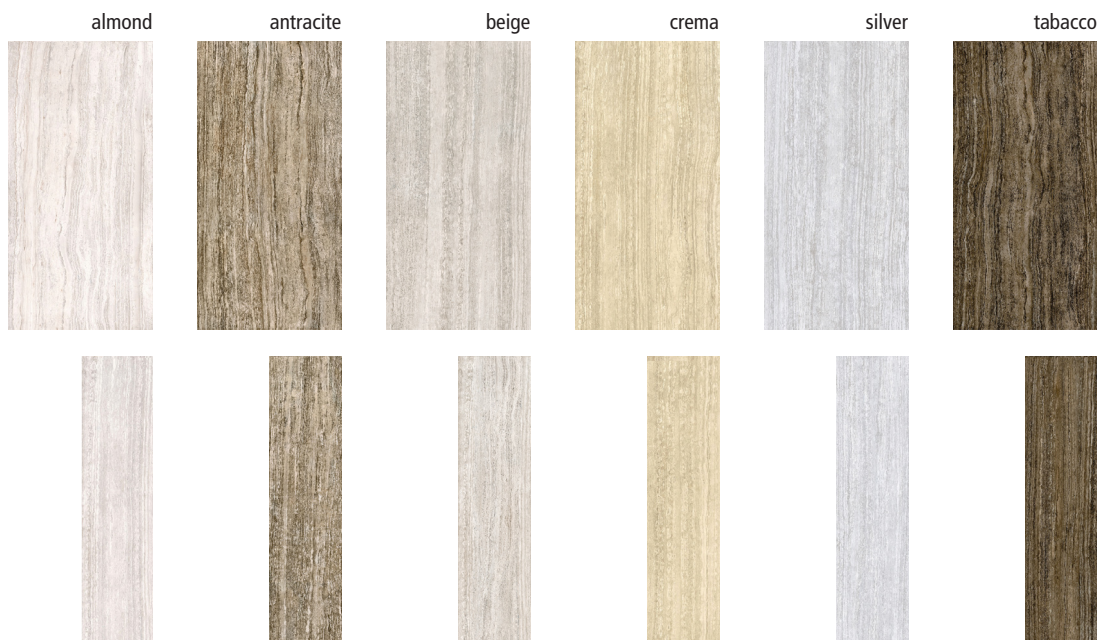
### AVAILABLE SIZES



### DESCRIPTION



A gorgeous glazed porcelain from Italy, Seta replicates the look of vein-cut travertine using digital inkjet technology. Available in two plank formats (6x24 and 12x24) and six colors: Almond, Beige, Crema, Silver, Tabacco and Antracite. Trim is available in 4x24. Vein-cut travertine is quickly becoming the next generation in stone design.

### COLORS




# TECHNICAL INFORMATION

## TILE SIZES

| Nominal | Shape   | Finish | Thickness |
|---------|---|--------|-----------|
| 12 x 24 |  | Matte  | 9.5 mm    |
| 6 x 24  |  | Matte  | 9.5 mm    |

## COORDINATING TRIM

| Nominal         | Shape   | Finish | Thickness |
|-----------------|---|--------|-----------|
| 4 x 24 Bullnose |  | Matte  | 9.5 mm    |

## PERFORMANCE DATA

| CHARACTERISTIC   | NORMS        | RESULTS     |
|--|--------------|-------------|
| Water Absorption   | ISO 10545-3  | < 0.1 %     |
| PEI Abrasion Resistance (Glazed)                           | ISO 10545-7  | 4           |
| Breaking Strength  | ISO 10545-4  | ≥ 56 n/mm2  |
| Static Coefficient of Friction Wet                         | C1028        | 0.63        |
| Dimensions Range   | ISO 10545-2  | Conforms    |
| Frost Resistance   | ISO 10545-12 | Frost Proof |
| Chemical Resistance - Household Chemicals                  | ISO 10545-13 | Conforms    |
| Chemical Resistance - Low Concentration of Acids and Bases | ISO 10545-9  | Conforms    |
| Scratch Hardness   | MOHS         | 7 to 8      |
| Thermal Shock Resistance                                   | ISO 10545-9  | Conforms    |
| Resistance to Stains                                       | ISO 10545-14 | Class 5     |

## SHADE VARIATION



V2 - SLIGHT VARIATION  
Clearly distinguishable differences in texture and/or pattern within similar colors.

## WEAR CODE

4 - Rated for all residential and light commercial applications.

## APPLICATIONS

|                            | RESIDENTIAL | LIGHT COMMERCIAL | COMMERCIAL |
|----------------------------|-------------|------------------|------------|
| FLOORS                     | ×           | ×                |            |
| WALLS / BACKSPLASH         | ×           | ×                | ×          |
| POOL DECKING               | *           | *                |            |
| EXTERNAL USE - FROST PROOF | ×           | *                |            |

× - Has been approved for this application.  
\* - Information is available upon request.

## NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.