


## Evoque | Porcelain



### AVAILABLE SIZES



### DESCRIPTION

Evoque Italian porcelain tile celebrates the beauty and diversity of encaustic tile and patterned tile designs. This exciting collection of 8" x 8" tiles offers 6 pure color options, and a stunning array of decorative tiles. Whether incorporating a random mix of decorative tile designs, or focusing on four specific decorative tile patterns, Evoque will bring an elegant, timeless look to your room.


### PALAZZO DUCALE (SINGLE PATTERN)



### PALAZZO DUCALE (MIX)



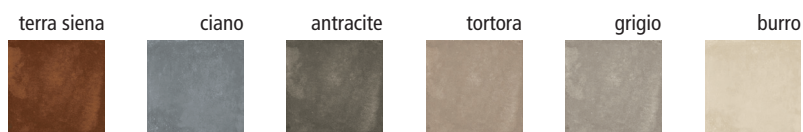

### SOLID COLORS




# TECHNICAL INFORMATION

## TILE SIZES

Nominal	Shape	Finish	Thickness
8x8 Deco		Matte	10 mm
8x8 Field		Matte	10 mm

## COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3.25 x 24 Bullnose		Matte	10 mm

## PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5 %
PEI Abrasion Resistance (Glazed)	ISO 10545-7	Antracite - 3; Burro - 5; All Others - 4
Breaking Strength	ISO 10545-4	> 38 N/mm2
Wet DCOF	AcuTest	0.52
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Resistant
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Resistant
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Class 5
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

## SHADE VARIATION

Decos:



V2 - SLIGHT VARIATION

Clearly distinguishable differences in texture and/or pattern within similar colors.

Field Tile / Bullnose:



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

## WEAR CODE

Burro: 5 - Rated for all residential and commercial applications.

Antracite: 3 - Rated for all residential applications.

All others: 4 - Rated for all residential and light commercial applications.

## APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✕	✕	
WALLS / BACKSPLASH	✕	✕	✕
POOL DECKING			
EXTERNAL USE - FROST PROOF			

✕ - Has been approved for this application.  
\* - Information is available upon request.

## NOTES

Minimum Grout Joint Recommendation: 3/16"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.